


MT HOOD

Touch-Screen Extenders

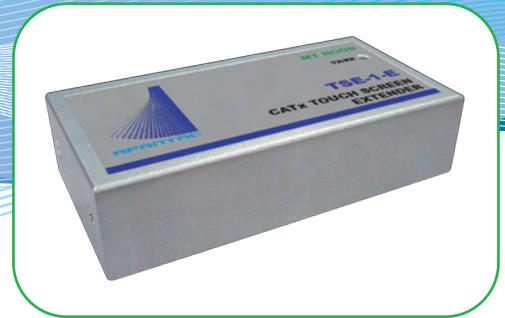


- Extend VGA with USB or RS232 control over a single CATx Cable
- Extend DVI-D with USB control over a single CATx Cable
- Maximum DVI-D resolution of 1920 x 1200 up to 35 meters (115 feet)
- Maximum VGA resolution of 2048 x 1536 up to 330 meters (1,000 feet)
- Plug and play - no software required
- Remote / local monitoring and control

TSE-1-E
TSE-1-R
 VGA / RS232
 Touch-Screen
 Extender /
 Receiver

TSE-1-Eu
TSE-1-Ru
 VGA / USB
 Touch-Screen
 Extender /
 Receiver


TSE-1-ED
TSE-1-RD
 DVI-D / USB
 Touch-Screen
 Extender /
 Receiver

TSE-1-E / TSE-1-R

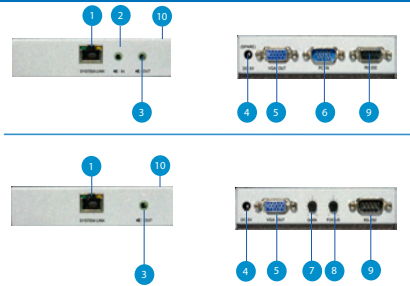


- | | |
|------------------------|-------------------------------|
| 1 System Link | 6 PC Input (with combo cable) |
| 2 Audio Input | 7 Gain |
| 3 Audio Output | 8 Focus |
| 4 5V DC Input | 9 RS-232 Control Port |
| 5 Local Monitor Output | 10 RS-232 Tx/Rx Status |

TSE-1-Eu / TSE-1-Ru

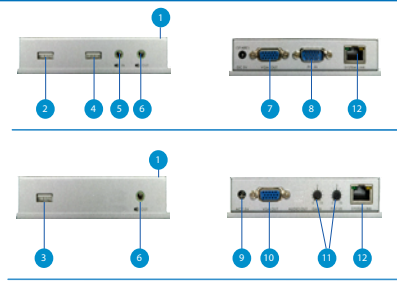

- | | |
|----------------------|-----------------------------|
| 1 USB Tx/Rx Status | 7 Local Monitor Output |
| 2 Keyboard Input | 8 PC Input (w/ combo cable) |
| 3 Touch-Screen Input | 9 5V DC Input |
| 4 Mouse Input | 10 VGA Out |
| 5 Audio Input | 11 Gain / Focus Adjustments |
| 6 Audio Output | 12 System Link |

TSE-1-ED / TSE-1-RD

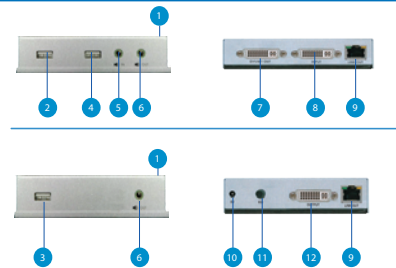

- | | |
|----------------------|-----------------------------|
| 1 USB Tx/Rx Status | 7 Local Monitor Output |
| 2 Keyboard Input | 8 PC Input (w/ combo cable) |
| 3 Touch-Screen Input | 9 System Link |
| 4 Mouse Input | 10 5V DC Input |
| 5 Audio Input | 11 EQ Adjustment |
| 6 Audio Output | 12 DVI Output |

Touch-Screen Data Cables



DB-9 RS232 Female / Male



CBK 1510 AU

MT HOOD Touch-Screen Extenders

SPECIFICATIONS

MODEL	TSE-1-E	TSE-1-R	TSE-1-Eu	TSE-1-Ru
Description	VGA / RS232 Touch-Screen Extender with Audio	VGA / RS232 Touch-Screen Receiver with Audio	VGA / USB Touch-Screen Extender with Audio	VGA / USB Touch-Screen Receiver with Audio
Input	1 x VGA 1 x RS232 (with VGA, RS232, USB Power Combo Cable) 1 x Audio	1 x RJ45	2 x USB (with VGA, USB Power Combo Cable) 1 x Audio	1 x RJ45 (Link)
Output	1 x RJ45 (Link) 1 x VGA (Local Output) 1 x Audio	1 x VGA 1 x RS232 1 x Audio	1 x RJ45 (Link) 1 x VGA (Local Output) 1 x Audio	1 x VGA 1 x USB 1 x Audio
Adjustments	N/A	Equalizer, Gain	N/A	Equalizer, Gain
Resolution / Distance	Maximum 2048 x 1536 up to 330 meters (1,000 feet)		Maximum 2048 x 1536 up to 330 meters (1,000 feet)	
Mount	Magnetic	Magnetic	Magnetic	Magnetic
Dimensions	113 mm W x 62 mm D x 29 mm H		113 mm W x 62 mm D x 29 mm H	
Power	USB 5v or Optional 5 v 1000 mA	DC 5v 1000 mA	USB 5v or Optional 5 v 1000 mA	DC 5v 1000 mA

MODEL	TSE-1-ED	TSE-1-RD
Description	DVI-D / USB Touch-Screen Extender	DVI-D / USB Touch-Screen Receiver
Input	1 x DVI-D 2 x USB 1 x Audio (with DVI, USB, Audio Combo Cable)	1 x RJ45
Output	1 x DVI-D 1 x RJ45	1 x DVI-D 1 x USB
Adjustments	N/A	Equalizer
Resolution / Distance	Maximum: 1920 x 1200 up to 35 meters (115 feet)	
Mount	Magnetic	Magnetic
Dimensions	113 mm W x 62 mm D x 29 mm H	
Power	USB 5v or Optional 5v 1000 mA	DC 5v 1000 mA