

MULTI - FORMAT LCD MONITOR

PRM-902A

Dual 9" LCD 4RU Multi-Channel Rack Monitor

Featuring two 9" 800x480 CCFL backlit LCD panels with 90° tilt range, the 4RU PRM-902A provides front panel individual control of Brightness, Contrast, Chroma, SDI A/B select, Analog, Aspect select (16:9, 4:3), H/V Delay, Embedded audio level, Scan (Over, Zero, 1:1), Marker (user selectable), Blue/Mono, Waveform/Vectorscope and the PRM full feature/setup menu.

Inputs include two SDI with active loop through plus component analog, S-Video, RGB, three composite analog inputs, RJ45 remote control and serial firmware upgrade port. Outputs include one SDI and one stereo mini audio out.




►► Product Highlights

- Multi-Format Support (480i,576i,720P,1080i,1080P,1080Psf,2K)
- 2x HD/SD-SDI inputs (Auto Detecting/Switching) with Active Loop Through
- Dual High Definition 9-inch (800x480) 16.7MegaPixel Wide Screen
- Varieties of Analog Input (Composite, S-Video, YPbPr, RGB)
- 4RU of a standard EIA 19 inch rack
- Assignable Remote Control
- H/V Delay mode
- Analog Stereo Audio Out (Phone Jack)
- Internal Left & Right Speaker (2 x 1W)
- Blue Only & Monochrome
- Markers & Safety Areas including user defined Markers
- Source ID Function (User Defined in OSD Function)
- Embedded Audio Level Meter (8ch)
- Timecode Display (VITC & LTC)
- Selectable Full & Small Size, WaveForm/Vector scope (SDI only)

►► Connector Panel

Dimensions (W x H x D) : 480x176x63 (mm)/18.8X6.9X2.4 (inch), 4RU, Weight : 4.1 kg/8.8 lb

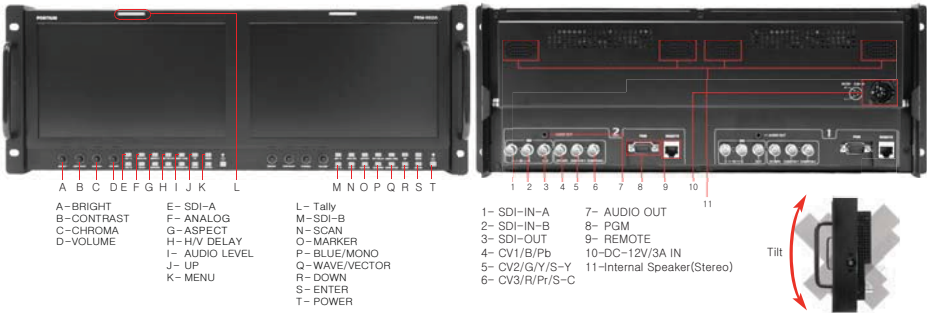

►► Product Specifications

Number of Screens		2
Input (1 Screen)	3 x BNC	3 Composite Inputs S-Video / RGB / Component
	2 x BNC	SDI 2 Channel Inputs
	1 x BNC	Composite Input
Output (1 Screen)	2 x BNC	SDI Channel / Composite Outputs
	1 x Phone Jack	Analog Stereo Audio Out
	2 x Speaker	2 x 1W
Input Signal	Analog	Composite (1.0Vpp with Sync) S-Video (1.0Vpp Ywith Sync, 0.268Vpp (c) Component (1.0Vpp Ywith Sync, 0.7Vpp [Fb,Pr]) RGB (1.0Vpp Gwith Sync, 0.7Vpp [B,R])
	HD-SDI	1.485 Gbps
	SD-SDI	270 Mbps
SDI Input Signal Formats		1080i (60/59.94/50)
	SMPTE-274	1080P (30/29.97/25/24/24sF/23.98/23.98sF)
	SMPTE-296M	720P (23.98/24.25/29.97/30/50/59.94/60)
	SMPTE-260M	1035i (60/59.94)
	SMPTE-125M	480i (59.94)
	ITU-R.BT.656	576i (50)
	2K Format	2048 x 1080 (23.98psf/24psf/23.98p/24p)
CVBS Input		NTSC (525 / 59.94), PAL (625/50), PAL-M (525 / 59.94)
S-Video Input		NTSC (525 / 59.94), PAL (625/50), PAL-M (525 / 59.94)
Component, RGB Input		480i (59.94), 576i (50), 480P (59.94), 576P (50)
		1080i (60/59.94/50)
		1080P (30/29.97/25/24/24sF/23.98/23.98sF)
LCD		720P (50/59.94/60)
	Size	9 inch/196.8 (H) X 118.08 (V) mm
	Resolution	800 x 480 (15 : 9)
	Pixel Pitch	0.246 (H) x 0.246 (V) mm
	Color	16.7M (True), 24bit
	Viewing Angle	H : 160 degrees V : 140 degrees
	Luminance of White	600cd (center)
Contrast	600 : 1	
Power		12V DC. 3A
Power Consumption (Approx)		36 Watts
Operating Temperature		0°C to 40°C (32°F to 104°F)
Storage Temperature		-30°C to 50°C (-22°F to 122°F)
Optional Accessories		UMD Jender / DC Power Adapter

* Specifications may be changed without notice